



Screen SL15

In this documentation you will find information about:

- Description
- Placement
- Maintenance
- Connections
- Options
- Dynamic Damping Control
- Technical specifications

Description

The SL15 is a high performance low frequency cabinet, with a single SA1513 long-excursion woofer with 4" voice-coil in an ultra-slim sized MDF cabinet. The SL15 is recommended for applications where high quality bass enhancement is needed where limited placement space is available.

Placement

The Super Space Saving design enables the SL15 to be flown behind the screen with a minimum of space required. Mounting is done by attaching cable or chain to two eyebolts, which are located on the side of the cabinet. The SL15 can also be placed on a platform or on the floor, since the bass reflex vents are located on the sides of the cabinet.

Please note that bass-response may vary with the position of the cabinet, through "acoustic coupling"! (floor, ceiling and wall reflections).

Maintenance

Maintenance on the SL15, especially on the drivers, is best left to official Stage Accompany service personnel.

However, cleaning of the cabinet can easily be done by yourself with a damp lint-free cloth.

Connections


The SL15 has two SpeakON NL4 connectors and one spring-terminal connector for connecting separate wires.

(Caution: when linking, make sure nominal impedance stays within amplifier specification!).

When using the spring-terminals, be aware of the right polarity (see connector panel).

Options


The SL15 is standard finished in SA Black Protecture, but is also available in any possible RAL color (Multi Color Option™).

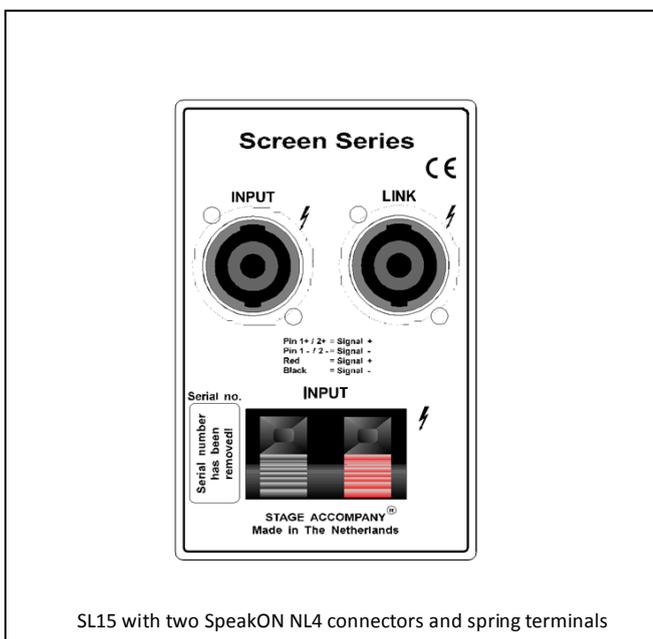

SL15 with two SpeakON NL4 connectors and spring terminals


Wiring for DDC™

For absolute top quality sound reproduction, the SL15 is equipped with Dynamic Damping Control™. The DDC™ system is based on two loudspeaker wires that return from the speaker to the (SA) amplifier. The picture on the right shows the wiring of SpeakON NL4 connector in combination with the DDC™ system.

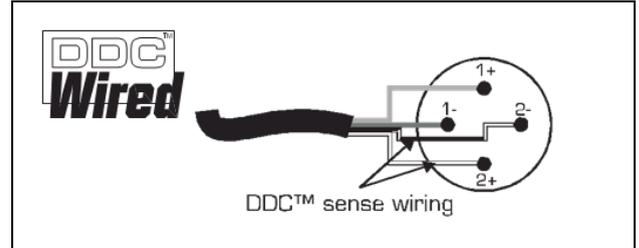

Technical specifications

Frequency response	:	39Hz – 100Hz (+/- 3dB)
Transducers	:	1 x SA1513, 15" LF driver
Recommended cross-over frequency	:	100Hz
Nominal impedance	:	8Ω
Sensitivity @ 1W/1m	:	95dB
Max. RMS power	:	400W
Max. Peak power	:	1000W
SPL program/peak	:	121dB/125dB
Enclosure construction	:	15mm MDF, Protecture finish
Color	:	SA Black, other colors on request
Front	:	n.a.
Connectors	:	2 x SpeakOn NL4 (linked), 1 x spring-terminal
Physical dimensions (H x W x D)	:	1200mm x 500mm x 230mm (47.2" x 19.7" x 9.1")
Weight	:	35.3kg (77.8lb)
Warranty	:	5 years limited (1 year on 'moving parts')

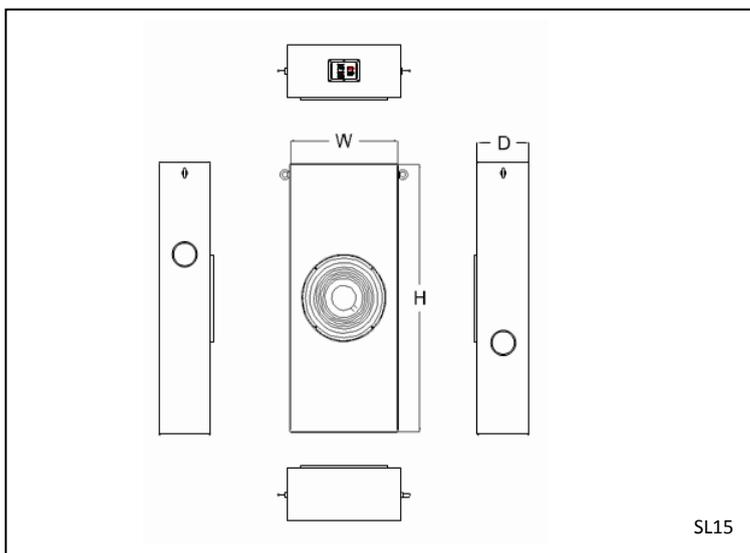

Stage Accompany bv
Haven 28
2984 BR Ridderkerk
The Netherlands
Tel: 31 (0)180 426225
Fax: 31 (0)180 421831
E-mail: info@StageAccompany.com

Copyright 2013 Stage Accompany bv .
The information in this document is continually being developed. Whilst every effort has been made to make it as accurate as possible, no warranty of accuracy is made or implied by the makers. Stage accompany shall have neither liability, nor responsibility to any person or entity with the respect to loss or damages in connection with or arising from the information contained in this document

That's How Music Should Sound!